ARON LIGHT

TECHNICAL INFORMATIONS

RECESSED SQUARE PANEL
24W 3CCT WHITE

Painel de Encastrar e Superfície, ideal para tectos falsos com altura limitada.

Recessed and Surface Panel, ideal for dropped ceiling with limited height.

Panel de Encastrar y Superficie, ideal para techos falsos con altura limitada.

ILAR-02910

REFERENCE	
Led Type	SMD
Mounting Type	Recessed
Body Material	Aluminium
Housing Colour	White
Body Shape	Square
LGP	PS
LED Brand	35000hrs
Useful Lifetime Based on LM70	Samsung LED
Dimmable	No

DIMENSION & WEIGHT	
Lenght	298mm
Width	298mm
Height	18mm
Weight	0.835kg
Cut-Out	275x275mm

PHOTOMETRICAL DATA	
Total Luminous Flux	2160lm
Luminous Efficacy	90lm/w
Beam Angle	120°
Colour Temperature	3CCT 3000K/4000K/6500K
Colour Rendering Index	>80
Colour Consistency	<= 6
UGR	

ELECTRICAL AND OPERATING DATA	
Nominal Wattage	24W
Nominal Voltage	176-264V
Operating Frequency	50/60Hz
Power Factor	0.7
Operating Temperature	- 20°C to + 40°C

ENERGY LABEL & STANDARDS	
Energy Consumption KWH/1000H	24kwh
Type of Protection	IP44
Protection Class	Class II

CERTIFICATIONS	
2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
Warranty	3 YEARS

SIZE

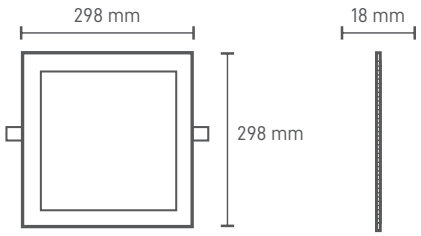

Designed by Aronlight in Portugal Made in PRC

Aronlight | Estrada Outurela 131A
Telefone: +351 215 846 905 - 2790-118 Carnaxide, Portugal
www.aronlight.com
geral@aronlight.pt